


GEOMETRY

Slack/Moderate	M	L	XL	XXL
Seat tube	420	420	470	470
Top Tube Horizontal	583 / 585	604 / 605	627 / 629	656 / 655
Seat angle	76.7° / 76.5°	76.7° / 76.5°	76.7° / 76.5°	76.7° / 76.5°
Head tube angle	63.8° / 64.4°	63.8° / 64.4°	63.8° / 64.4°	63.8° / 64.4°
Chainstays	435	435	435	435
Head tube	103	105	115	135
Wheelbase	1223 / 1216	1244 / 1236	1268 / 1261	1297 / 1289
BB-Height to Hub	27 / 25	27 / 25	27 / 25	25
Protrusion height - 80mm	742 / 746	737 / 741	755 / 759	759 / 763
Reach	446 / 444	466 / 464	486 / 484	506 / 504
Stack	626 / 627	627 / 629	636 / 638	656

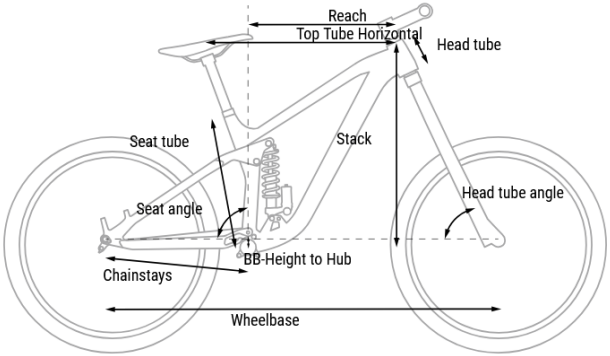

ERGONOMICS

	M	L	XL	XXL
Stem length	40	40	50	50
Angle stem	6°	6°	6°	6°
Handlebar width	800	800	800	800
Crank length	170	170	170	170
Length seat post	462	510	510	510
Diameter seatpost	31.6	31.6	31.6	31.6
Stroke seatpost	150	170	170	170
Diameter tire maximum	758	758	758	758
Width tire maximum	66	66	66	66
Rear suspension travel	170	170	170	170

All values are given in millimetres or degrees.