


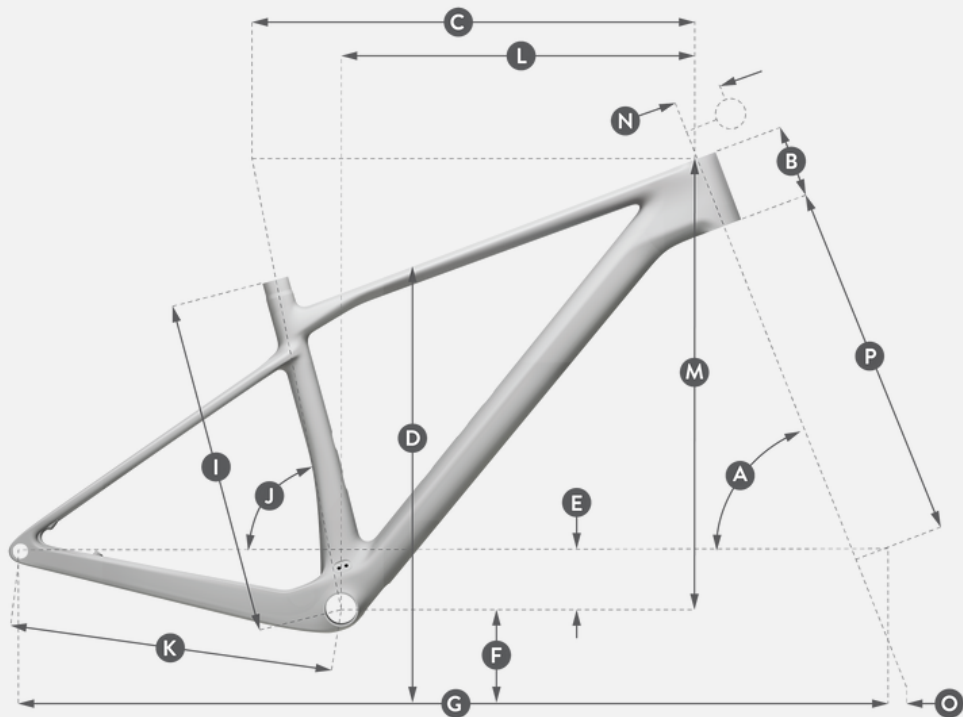

MM INCHES

		XS	S	M	L	XL	XXL	
A	HEAD TUBE ANGLE	67.4 °	67.4 °	67.4 °	67.4 °	67.4 °	67.4 °	
B	HEAD TUBE LENGTH	90.0 MM	90.0 MM	100.0 MM	110.0 MM	120.0 MM	120.0 MM	
C	TOP TUBE HORIZONTAL	555.0 MM	575.0 MM	600.0 MM	625.0 MM	655.0 MM	675.0 MM	
D	STANDOVER HEIGHT	745.0 MM	755.0 MM	786.0 MM	805.0 MM	835.0 MM	870.0 MM	
E	BB OFFSET	-60.0 MM	-60.0 MM	-60.0 MM	-60.0 MM	-60.0 MM	-60.0 MM	
F	BB HEIGHT	315.0 MM	315.0 MM	315.0 MM	315.0 MM	315.0 MM	315.0 MM	
G	WHEEL BASE	1,091.4 MM	1,111.8 MM	1,138.2 MM	1,164.6 MM	1,195.9 MM	1,215.9 MM	
H	BB CENTER TO TOPTUBE CENTER							
I	BB CENTER TO TOP OF SEATTUBE	360.0 MM	390.0 MM	440.0 MM	480.0 MM	530.0 MM	580.0 MM	
J	SEAT ANGLE	75.0 °	75.0 °	75.0 °	75.0 °	75.0 °	75.0 °	
K	CHAINSTAY	425.0 MM	425.0 MM	425.0 MM	425.0 MM	425.0 MM	425.0 MM	
L	REACH	400.3 MM	420.3 MM	442.8 MM	463.3 MM	492.9 MM	512.9 MM	
M	STACK	596.1 MM	596.1 MM	605.3 MM	614.6 MM	623.8 MM	623.8 MM	
N	STEM LENGTH	50.0 MM	50.0 MM	60.0 MM	70.0 MM	80.0 MM	80.0 MM	
O	TRAIL	506.0 MM	112.6 MM	112.6 MM	112.6 MM	112.6 MM		
P	FORK LENGTH	160.0 MM		506.0 MM	506.0 MM	506.0 MM	506.0 MM	112.6 MM
Q	MAXIMUM SEATPOST INSERTION		160.0 MM	210.0 MM	250.0 MM	300.0 MM	506.0 MM	
R	CRANK LENGTH		170.0 MM	170.0 MM	175.0 MM	175.0 MM	350.0 MM	