


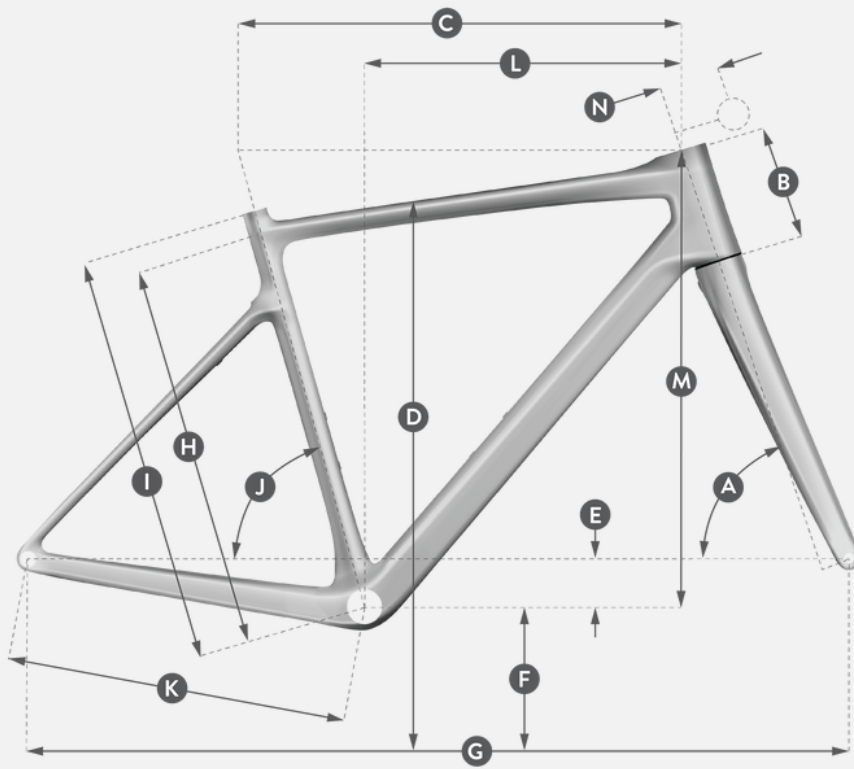

MM INCHES

		XXS/47	XS/49	S/52	M/54	L/56	XL/58	XXL/61
A	HEAD TUBE ANGLE	70.0 °	70.0 °	70.0 °	71.0 °	71.0 °	71.0 °	71.0 °
B	HEAD TUBE LENGTH	93.0 MM	103.0 MM	123.0 MM	143.0 MM	163.0 MM	183.0 MM	203.0 MM
C	TOP TUBE HORIZONTAL	512.3 MM	523.0 MM	536.5 MM	556.5 MM	571.2 MM	581.2 MM	594.2 MM
D	STANDOVER HEIGHT	747.0 MM	762.0 MM	786.0 MM	806.0 MM	825.0 MM	844.0 MM	869.0 MM
E	BB OFFSET	-71.0 MM	-71.0 MM	-71.0 MM	-71.0 MM	-71.0 MM	-71.0 MM	-71.0 MM
F	BB HEIGHT	283.0 MM	283.0 MM	283.0 MM	283.0 MM	283.0 MM	283.0 MM	283.0 MM
G	WHEEL BASE	1,019.5 MM	1,026.9 MM	1,037.7 MM	1,044.9 MM	1,056.4 MM	1,067.0 MM	1,071.3 MM
H	BB CENTER TO TOPTUBE CENTER	430.0 MM	450.0 MM	480.0 MM	500.0 MM	520.0 MM	540.0 MM	570.0 MM
I	BB CENTER TO TOP OF SEATTUBE	470.0 MM	490.0 MM	520.0 MM	540.0 MM	560.0 MM	580.0 MM	610.0 MM
J	SEAT ANGLE	75.0 °	74.5 °	74.0 °	73.0 °	72.5 °	72.5 °	72.5 °
K	CHAINSTAY	435.0 MM	435.0 MM	435.0 MM	439.0 MM	439.0 MM	439.0 MM	439.0 MM
L	REACH	374.0 MM	378.0 MM	382.0 MM	387.0 MM	392.0 MM	396.0 MM	403.0 MM
M	STACK	519.0 MM	528.4 MM	547.2 MM	570.0 MM	588.9 MM	607.8 MM	626.8 MM
N	STEM LENGTH	73.0 MM	83.0 MM	93.0 MM	103.0 MM	103.0 MM	113.0 MM	113.0 MM