


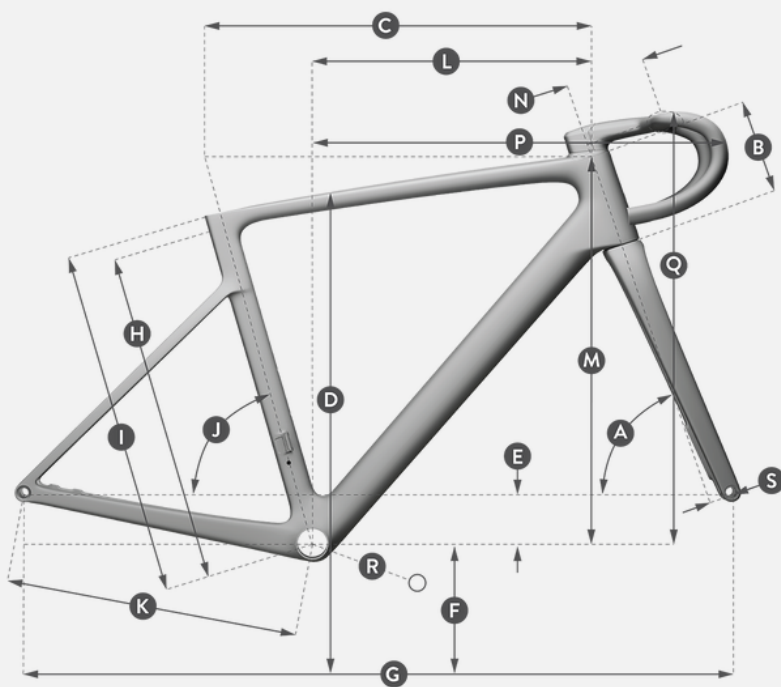

MM INCHES

		XXS/47	XS/49	S/52	M/54	L/56	XL/58	XXL/61
A	HEAD TUBE ANGLE	71.3 °	71.8 °	72.3 °	72.8 °	73.4 °	73.6 °	73.8 °
B	HEAD TUBE LENGTH	90.0 MM	100.0 MM	113.0 MM	130.0 MM	150.0 MM	170.0 MM	190.0 MM
C	TOP TUBE HORIZONTAL	519.0 MM	528.0 MM	542.0 MM	555.0 MM	572.0 MM	586.0 MM	602.0 MM
D	STANDOVER HEIGHT	725.0 MM	740.0 MM	758.0 MM	778.0 MM	799.0 MM	820.0 MM	840.0 MM
E	BB OFFSET	-74.0 MM	-74.0 MM	-73.0 MM	-72.0 MM	-72.0 MM	-72.0 MM	-72.0 MM
F	BB HEIGHT	270.5 MM	270.5 MM	271.5 MM	272.5 MM	272.5 MM	272.5 MM	272.5 MM
G	WHEEL BASE	977.0 MM	983.2 MM	988.8 MM	990.8 MM	999.0 MM	1,006.4 MM	1,015.4 MM
H	BB CENTER TO TOPTUBE CENTER	412.5 MM	432.5 MM	452.1 MM	472.0 MM	492.2 MM	512.3 MM	532.4 MM
I	BB CENTER TO TOP OF SEATTUBE	422.5 MM	442.5 MM	462.1 MM	482.0 MM	502.2 MM	522.3 MM	542.4 MM
J	SEAT ANGLE	74.5 °	74.5 °	74.0 °	73.6 °	73.3 °	72.8 °	72.5 °
K	CHAINSTAY	410.0 MM	410.0 MM	410.0 MM	410.0 MM	410.0 MM	410.0 MM	410.0 MM
L	REACH	379.4 MM	386.3 MM	391.6 MM	395.2 MM	402.6 MM	406.1 MM	411.3 MM
M	STACK	501.3 MM	512.5 MM	525.5 MM	543.3 MM	564.5 MM	584.3 MM	604.2 MM
N	STEM LENGTH	80.0 MM	90.0 MM	100.0 MM	110.0 MM	110.0 MM	120.0 MM	120.0 MM
O	HANDLEBAR WIDTH	360.0 MM	380.0 MM	380.0 MM	400.0 MM	400.0 MM	400.0 MM	420.0 MM
P	COCKPIT REACH	530.0 MM	547.0 MM	563.0 MM	577.0 MM	585.0 MM	599.0 MM	604.0 MM
Q	COCKPIT MIN. STACK	562.0 MM	573.0 MM	586.0 MM	604.0 MM	623.0 MM	643.0 MM	662.0 MM
R	CRANK ARM LENGTH	165.0 MM	165.0 MM	170.0 MM	172.5 MM	172.5 MM	175.0 MM	175.0 MM
S	FORK OFFSET	47.0 MM	47.0 MM	47.0 MM	44.0 MM	44.0 MM	44.0 MM	44.0 MM