


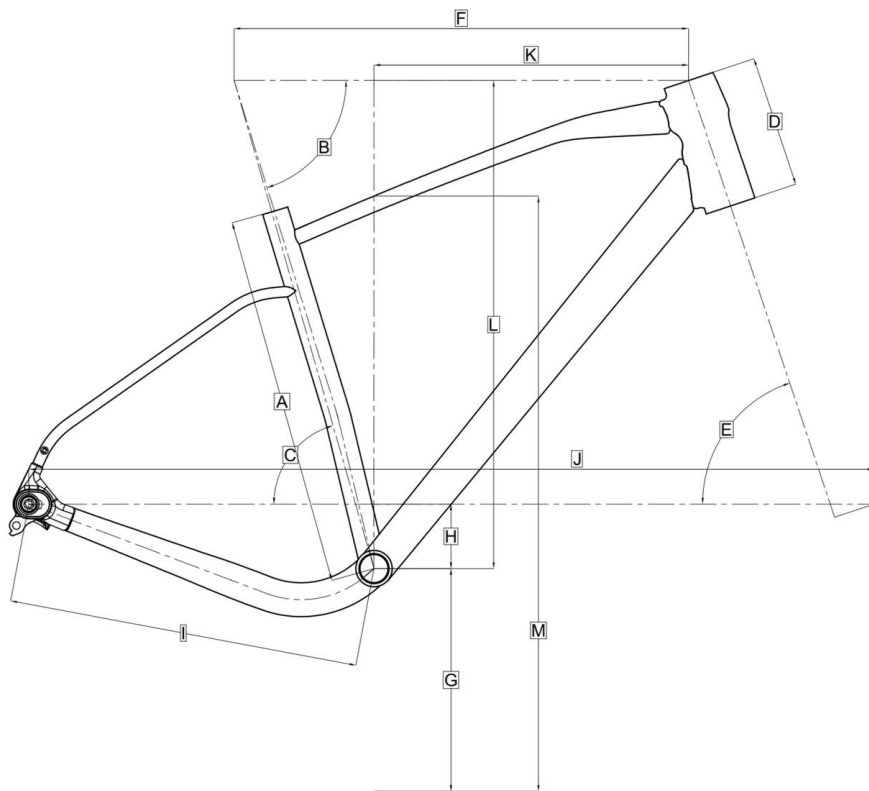

ALL ROAD	S	M	L	XL
Height (cm)	150-163	163-175	175-188	188-195
Seat Tube Length (A)	404	448	492	535
Seat Tube Angle (B)	74.75	74.26	73.76	73.26
Effective Seat Tube Angle (C)	74.75	74.26	73.76	73.26
Head Tube Length (D)	143	163	193	221
Head Tube Angle (E)	70.25	71.77	72.06	72.26
Effective Top Tube (F)	526	550	581	610
Bb Height (G)	265	265	265	265
Bb Offset (H)	79	79	79	79
Chainstay Length (I)	415	415	415	415
Wheelbase (J)	997	1003	1026	1048
Frame Reach (K)	371	383	400	415
Frame Stack (L)	566	59	621	648
Standover Height (M)	701	741	784	819

SPEED GRAVEL	S	M	L	XL
Height (cm)	150-163	163-175	175-188	188-195
Seat Tube Length (A)	404	448	492	535
Seat Tube Angle (B)	74.5	74	73.5	73
Effective Seat Tube Angle (C)	74.5	74	73.5	73
Head Tube Length (D)	143	163	193	221
Head Tube Angle (E)	70	71.5	71.8	72
Effective Top Tube (F)	526	551	581	611
Bb Height (G)	280	280	280	280
Bb Offset (H)	78	78	78	78
Chainstay Length (I)	425	425	425	425
Wheelbase (J)	1017	1022	1045	1067
Frame Reach (K)	369	381	397	412
Frame Stack (L)	568	593	622	650
Standover Height (M)	716	755	798	833