


Geometry

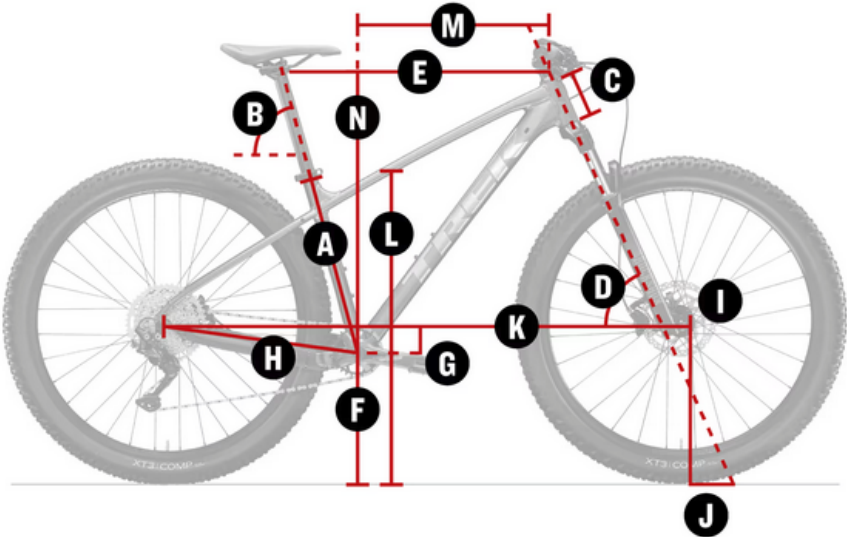

Geometry diagram labelling frame measurements A to N. Each label corresponds to a row in the geometry table below.

All measurements provided in cm unless otherwise stated.

Frame size number	13.5"	14.5"	15.5"	17.5"	18.5"	19.5"	21.5"	23"
Frame size letter	XXS	XS	S	M	ML	L	XL	XXL
Wheel size	26"	27.5"	27.5"	29"	29"	29"	29"	29"
A – Seat tube	32.0	34.0	37.0	41.9	44.4	47.0	52.1	55.9
B – Seat tube angle	74.0°	73.8°	73.8°	71.9°	71.9°	71.9°	71.9°	71.9°
Effective seat tube angle	74.0°	74.0°	74.0°	73.0°	73.0°	73.0°	73.0°	73.0°
C – Head tube length	9.0	9.0	10.0	9.0	9.0	10.0	12.0	12.0
D – Head angle	66.5°	66.5°	66.5°	69.5°	69.5°	69.5°	69.5°	69.5°
E – Effective top tube	52.1	55.1	57.9	60.2	61.8	63.8	65.9	67.3
F – Bottom bracket height	30.2	31.3	31.3	31.0	31.0	31.0	31.0	31.1
G – Bottom bracket drop	3.8	4.5	4.5	5.8	5.8	5.8	5.8	5.8
H – Chainstay length	43.3	43.3	43.3	43.8	43.8	43.8	43.8	43.8
I – Offset	4.0	4.2	4.2	4.2	4.2	4.2	4.2	4.2
J – Trail	10.4	11.0	11.0	9.3	9.3	9.3	9.3	9.3
K – Wheelbase	106.0	109.2	112.1	110.0	111.6	113.7	115.9	117.3
L – Standover	65.0	65.8	69.2	74.8	75.8	75.7	76.9	80.4
M – Frame reach	36.5	39.0	41.5	41.8	43.4	45.1	46.6	48.0
N – Frame stack	54.4	56.3	57.2	60.2	60.2	61.1	63.0	63.0