


Geometry

All measurements provided in cm unless otherwise stated.

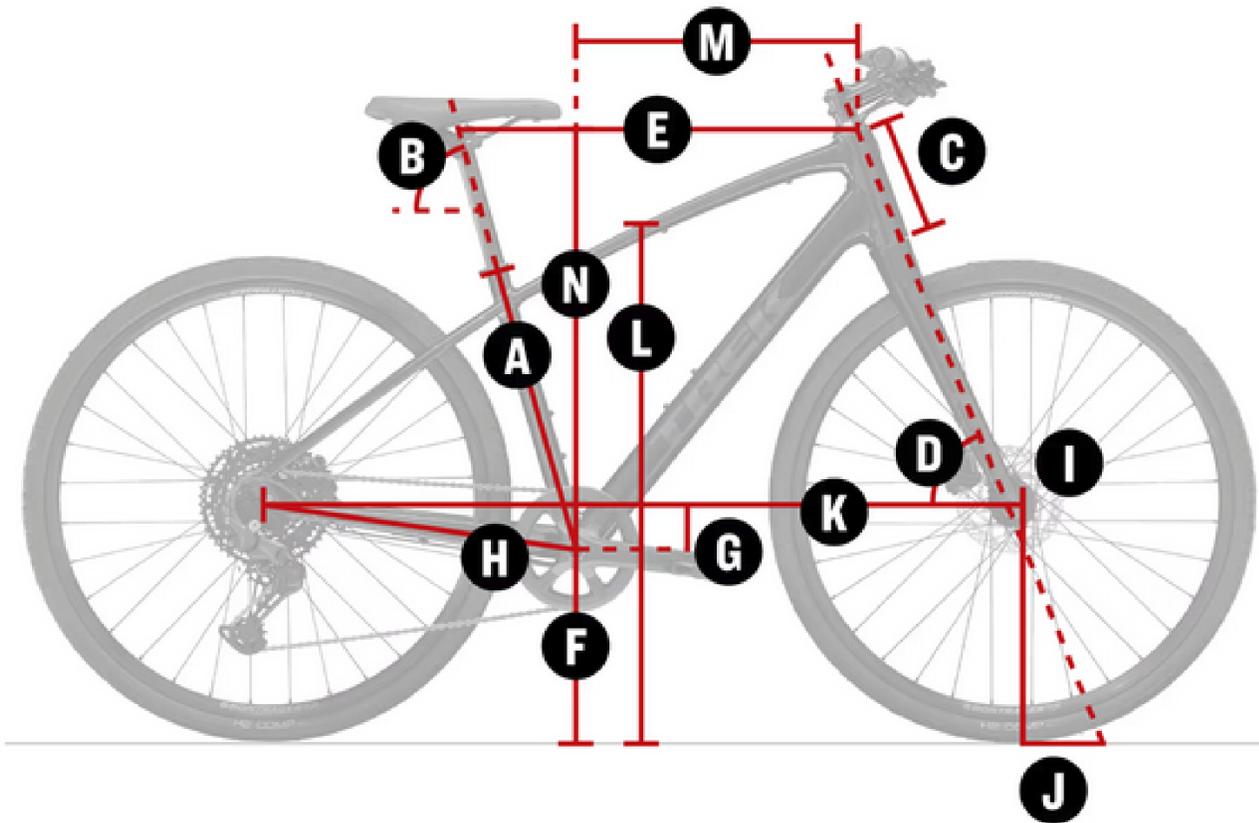

Geometry diagram labelling frame measurements A to N. Each label corresponds to a row in the geometry table below.

| | | | | | |
|---------------------------|-------|-------|-------|-------|-------|
| Frame size number | 40 | 45 | 50 | 55 | 60 |
| Frame size letter | XS | S | M | L | XL |
| Wheel size | 700c | 700c | 700c | 700c | 700c |
| A – Seat tube | 33.0 | 37.5 | 42.0 | 46.5 | 52.0 |
| B – Seat tube angle | 75.0° | 74.5° | 74.0° | 73.5° | 72.5° |
| C – Head tube length | 11.5 | 14.0 | 16.5 | 19.0 | 21.5 |
| D – Head angle | 70.0° | 70.5° | 71.0° | 71.5° | 72.5° |
| E – Effective top tube | 52.8 | 54.3 | 56.3 | 58.3 | 61.3 |
| F – Bottom bracket height | 28.5 | 28.5 | 28.5 | 28.5 | 28.5 |
| G – Bottom bracket drop | 6.5 | 6.5 | 6.5 | 6.5 | 6.5 |
| H – Chainstay length | 44.7 | 44.7 | 44.7 | 44.7 | 44.7 |
| I – Offset | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 |
| J – Trail | 7.4 | 7.1 | 6.8 | 6.4 | 5.8 |
| K – Wheelbase | 105.2 | 105.9 | 107.0 | 108.0 | 108.7 |
| L – Standover | 67.5 | 71.5 | 75.4 | 79.1 | 83.6 |
| M – Frame reach | 38.3 | 38.5 | 39.3 | 39.9 | 40.9 |
| N – Frame stack | 54.3 | 56.8 | 59.4 | 62.0 | 64.8 |