


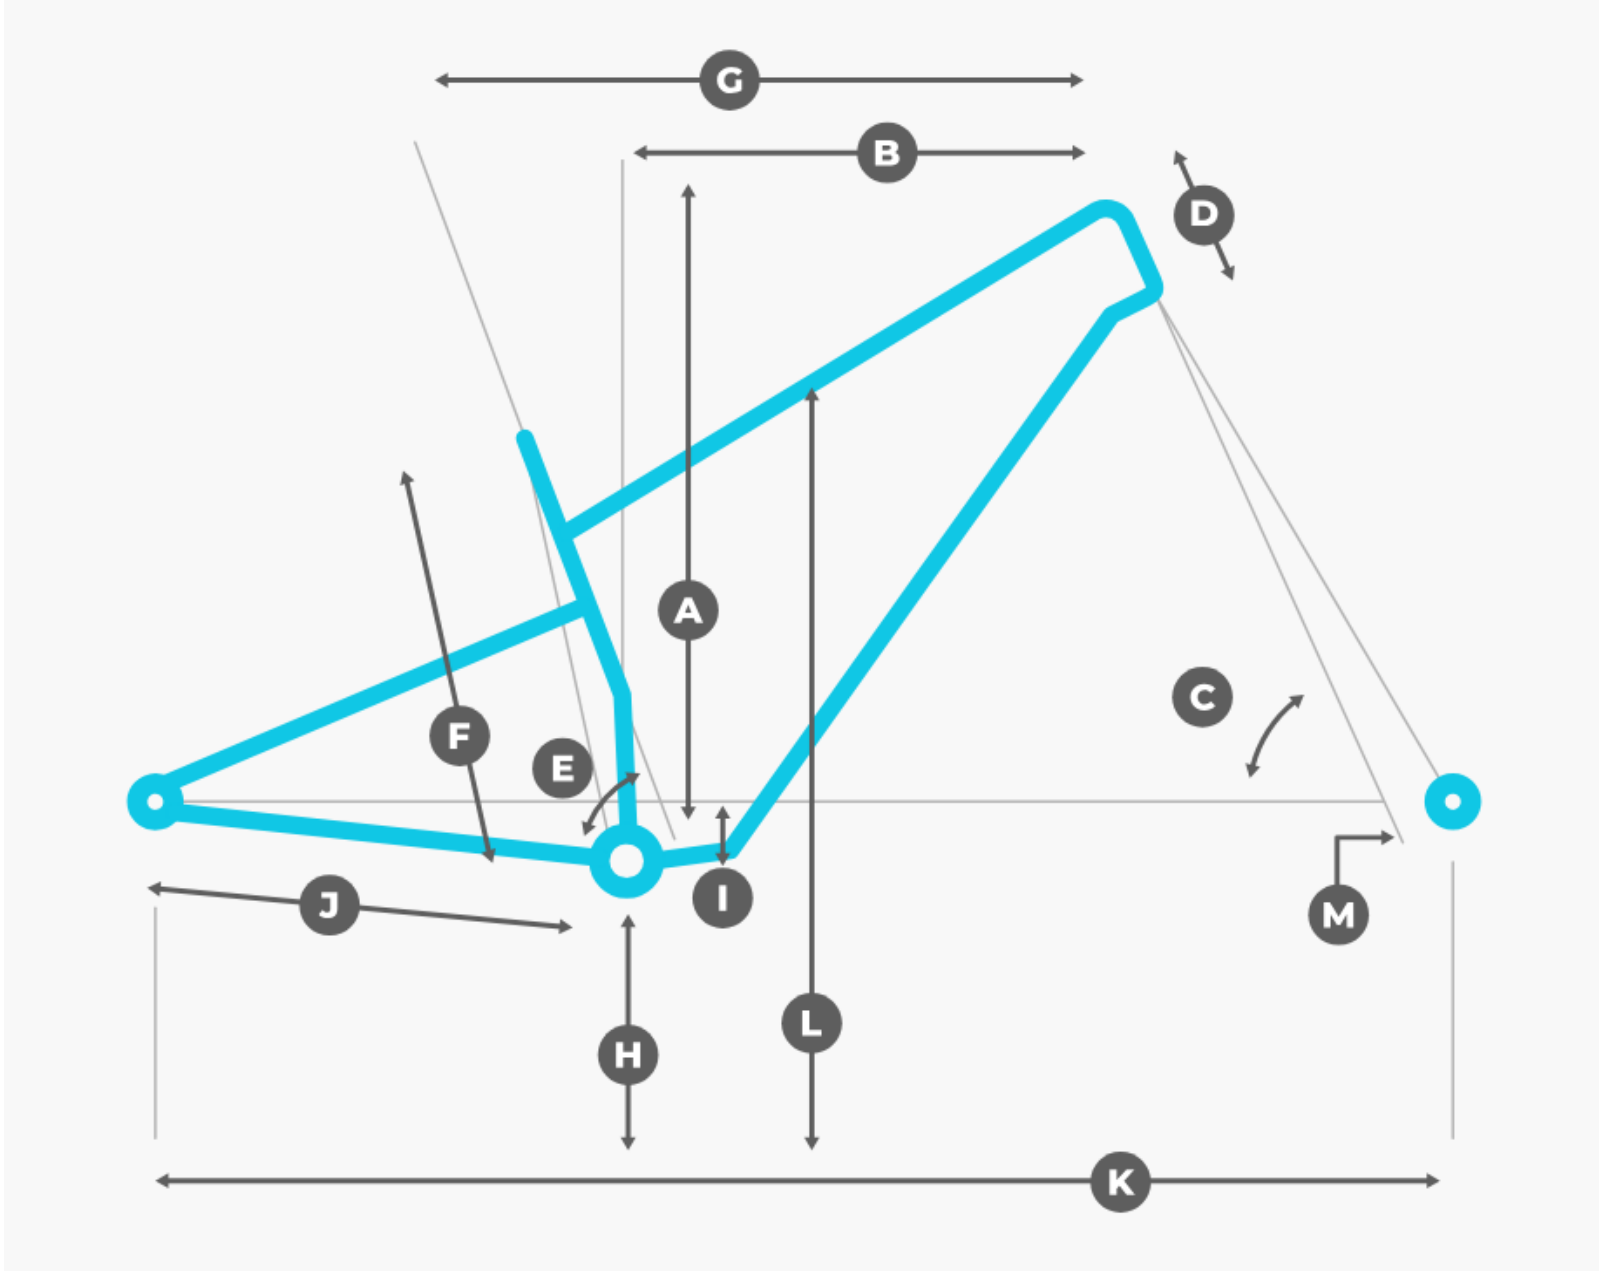

Frame Size	S	M	L	XL
Rider Height	5'2"–5'6"	5'6"–5'10"	5'10"–6'1"	6'1"–6'5"
(A) Frame Stack (mm)	604	609	622	636
(B) Frame Reach (mm)	440	465	485	505
(C) Head Tube Angle (°)	65	65	65	65
(D) Head Tube Length (mm)	90	95	110	125
(E) Seat Tube Angle (°)	71	71	71	71
Effective Seat Tube Angle (°)	77	77	77	77
(F) Seat Tube Length (mm)	390	400	415	430
(G) Effective Top Tube (mm)	568	595	619	644
(H) Bottom Bracket Height (mm)	338	338	338	338
(I) Bottom Bracket Drop (mm)	39 (Drop)	39 (Drop)	39 (Drop)	39 (Drop)
(J) Chainstay Length (mm)	430	430	430	430
(K) Wheelbase (mm)	1186	1214	1240	1267
(L) Standover Height (mm)	704	705	713	723
Front Travel (mm)	140	140	140	140
Rear Travel (mm)	135	135	135	135
Dropper Post Travel (mm)	150	150	170	170
Handlebar Width (mm)	780	780	780	780
Stem Length (mm)	35	35	35	35
Crank Length (mm)	170	170	170	170