


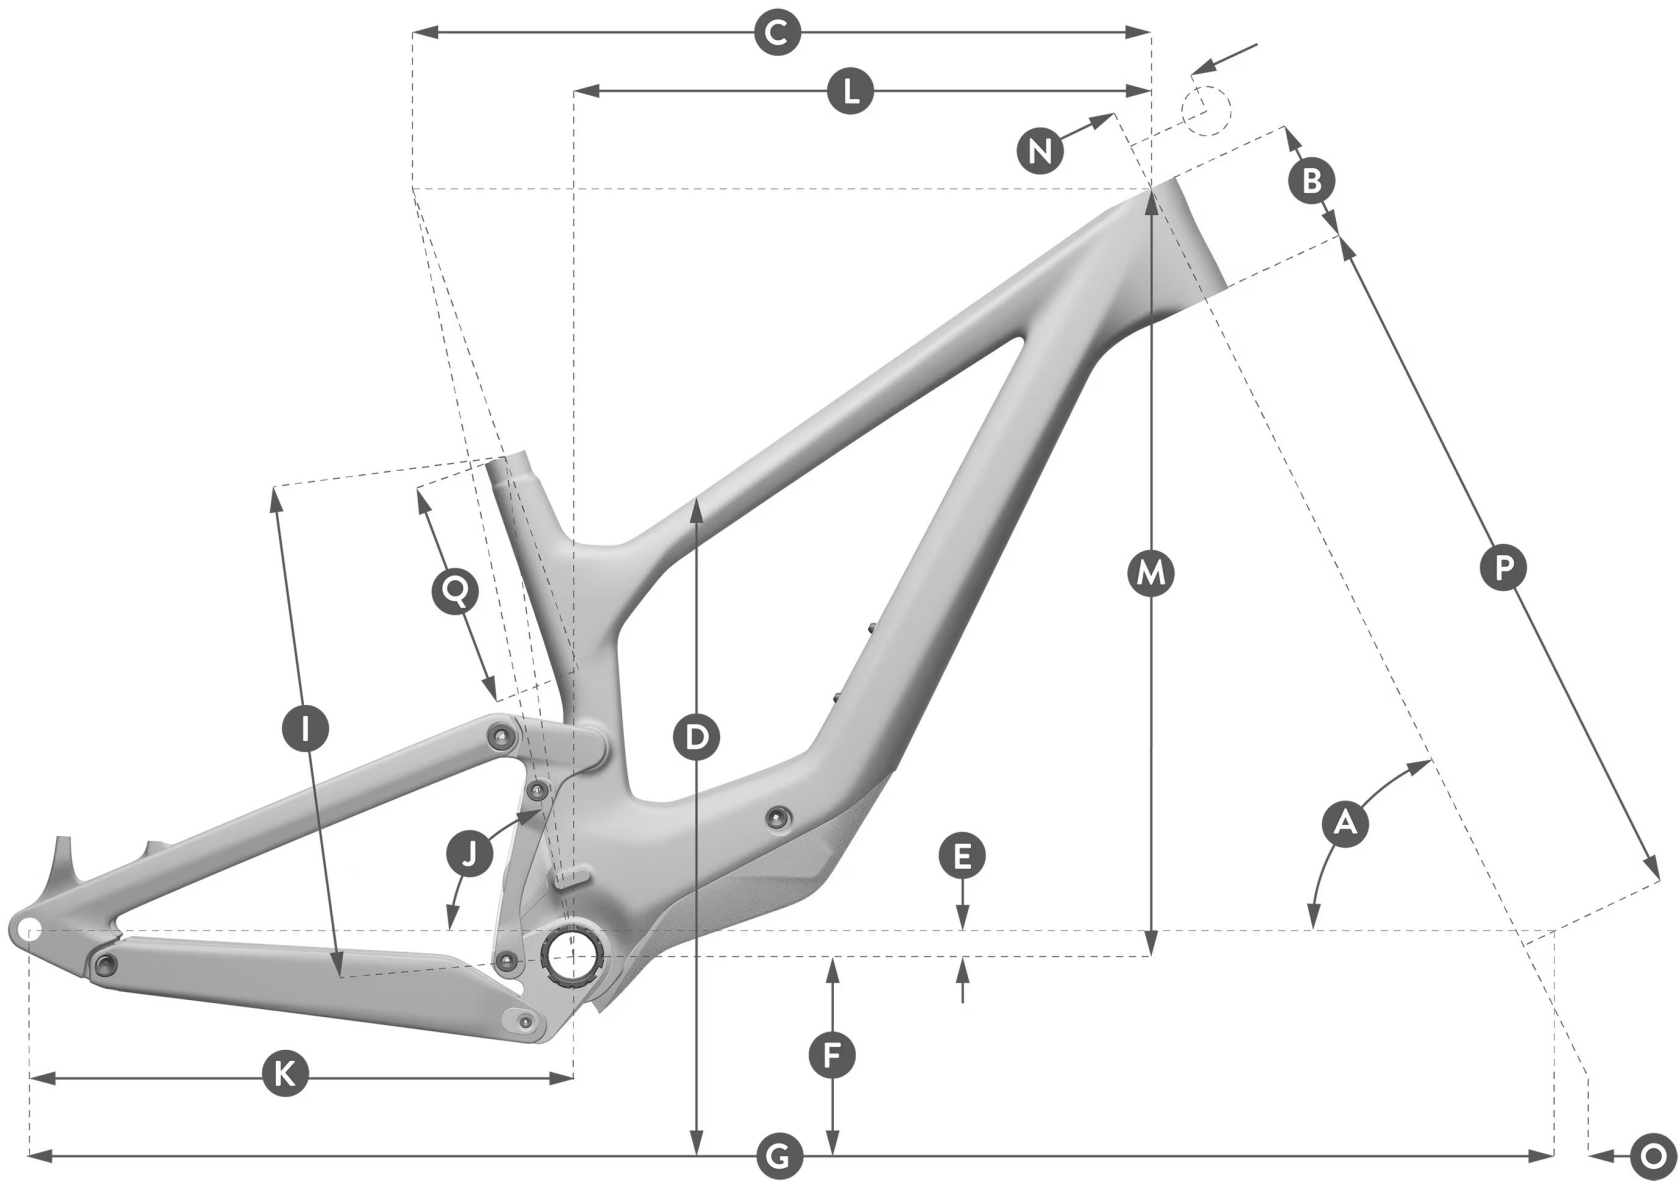

		S	M	L	XL
A	HEAD TUBE ANGLE / ANGLE TUBE DE DIRECTION	63.8 °	63.8 °	63.8 °	63.8 °
B	HEAD TUBE LENGTH / HAUTEUR TUBE DE DIRECTION	95.0 MM	100.0 MM	115.0 MM	125.0 MM
C	TOP TUBE HORIZONTAL / LONGUEUR HORIZONTALE TUBE SUPÉRIEUR	569.9 MM	598.7 MM	624.4 MM	649.1 MM
D	STANDOVER HEIGHT / HAUTEUR ENTRE-JAMBES	719.2 MM	725.4 MM	736.7 MM	755.3 MM
E	BB OFFSET / DEPORT AXE DE PÉDALIER	-25.0 MM	-25.0 MM	-25.0 MM	-25.0 MM
F	BB HEIGHT / HAUTEUR AXE DE PÉDALIER	350.0 MM	350.0 MM	350.0 MM	350.0 MM
G	WHEEL BASE / ENTRAXE ROUES	1,206.6 MM	1,238.8 MM	1,270.4 MM	1,299.8 MM
H	BB CENTER TO TOPTUBE CENTER / DIST. BOITIER - MILIEU TUBE SUPÉRIEUR				
I	BB CENTER TO TOP OF SEATTUBE / DIST. BOITIER - SOMMET TUBE DE SELLE	380.0 MM	410.0 MM	440.0 MM	470.0 MM
J	SEAT ANGLE / ANGLE TUBE DE SELLE	77.0 °	77.2 °	77.4 °	77.6 °
K	CHAINSTAY / LONGUEUR DES BASES	440.0 MM	440.0 MM	440.0 MM	440.0 MM
L	REACH / REACH	428.0 MM	458.0 MM	483.0 MM	508.0 MM
M	STACK / STACK	614.8 MM	619.3 MM	632.8 MM	641.7 MM
N	STEM LENGTH / LONGUEUR POTENCE	40.0 MM	40.0 MM	40.0 MM	40.0 MM
O	TRAIL / CHASSE AU SOL	135.5 MM	135.5 MM	135.5 MM	135.5 MM
P	FORK LENGTH / LONGUEUR FOURCHE	581.0 MM	581.0 MM	581.0 MM	581.0 MM
Q	MAXIMUM SEATPOST INSERTION / INSERTION MAXIMALE DE LA TIGE DE SELLE	184.5 MM	214.6 MM	244.7 MM	274.6 MM
R	CRANK LENGTH / LONGUEUR DE MANIVELLE	165.0 MM	170.0 MM	170.0 MM	170.0 MM