


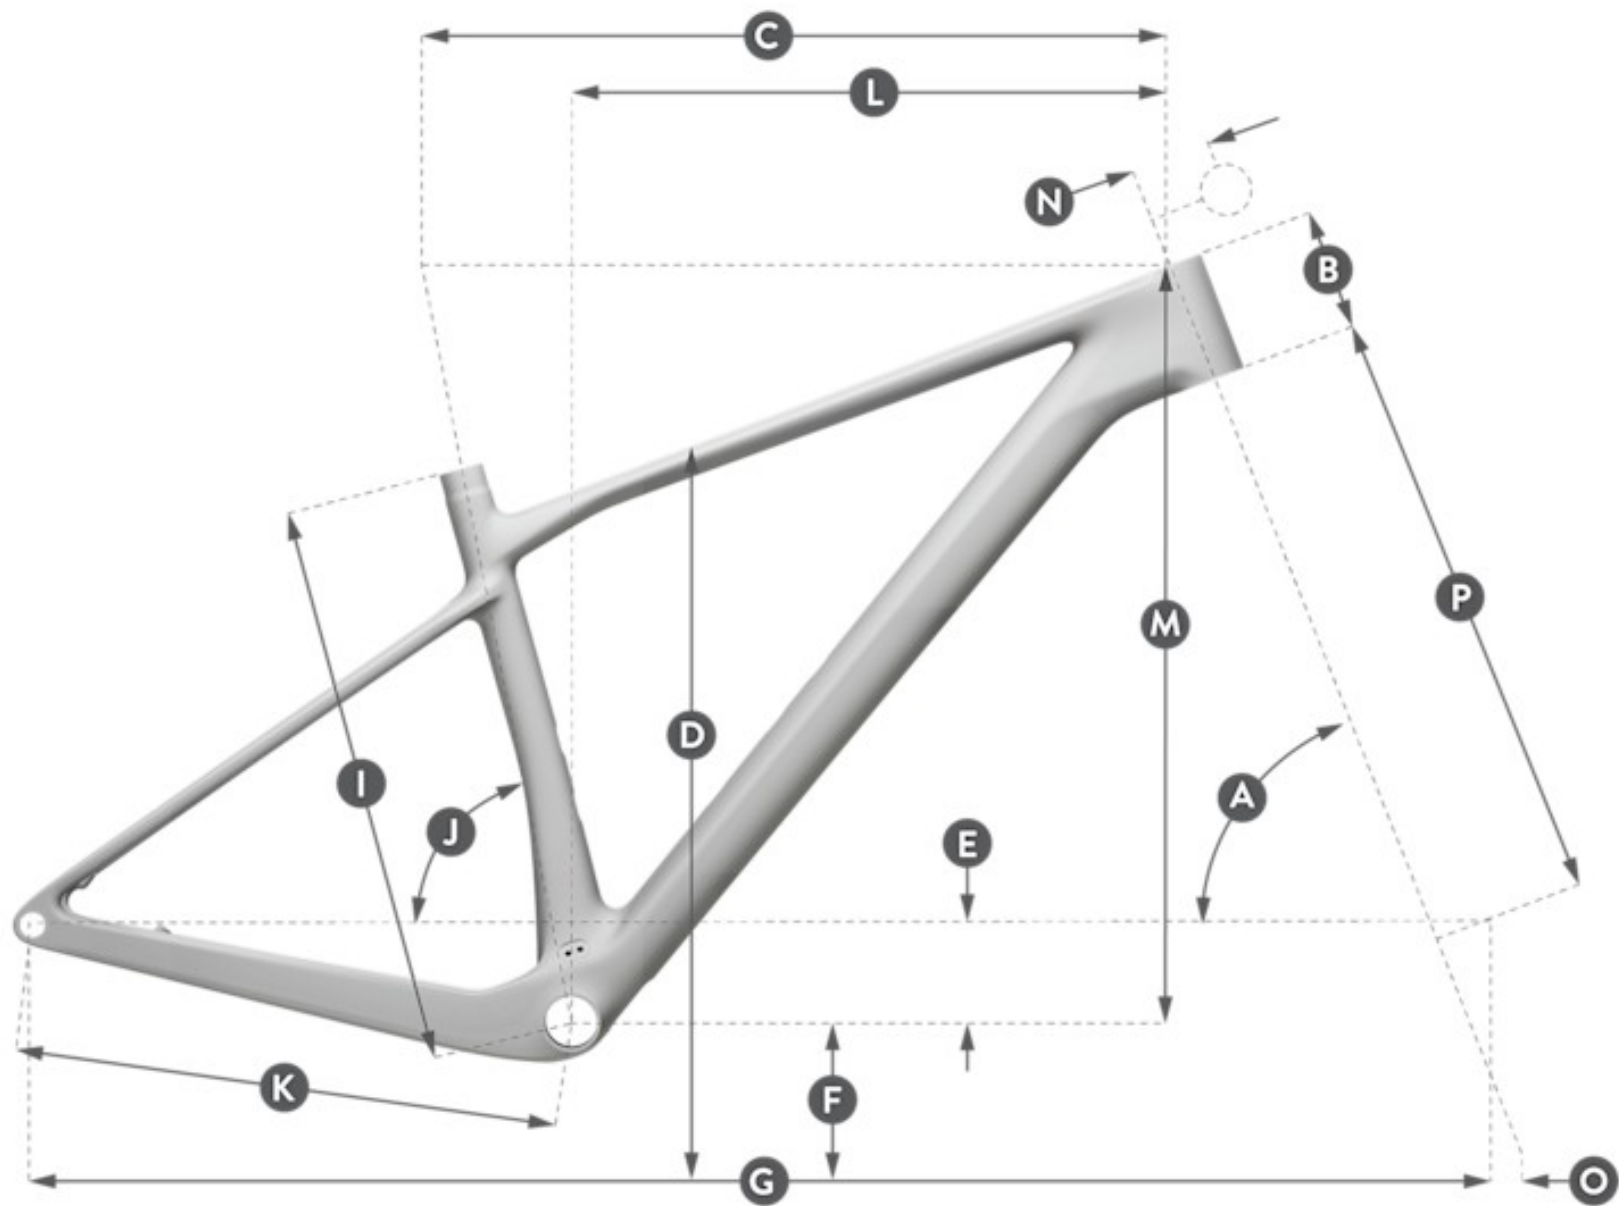

		S	M	L	XL
A	HEAD TUBE ANGLE / ANGLE TUBE DE DIRECTION	67.9 °	67.9 °	67.9 °	67.9 °
B	HEAD TUBE LENGTH / HAUTEUR TUBE DE DIRECTION	90.0 MM	95.0 MM	110.0 MM	120.0 MM
C	TOP TUBE HORIZONTAL / LONGUEUR HORIZONTALE TUBE SUPÉRIEUR	575.0 MM	600.2 MM	626.0 MM	656.5 MM
D	STANDOVER HEIGHT / HAUTEUR ENTRE-JAMBES	752.0 MM	781.0 MM	800.0 MM	835.1 MM
E	BB OFFSET / DEPORT AXE DE PÉDALIER	-62.0 MM	-62.0 MM	-62.0 MM	-62.0 MM
F	BB HEIGHT / HAUTEUR AXE DE PÉDALIER	313.0 MM	313.0 MM	313.0 MM	313.0 MM
G	WHEEL BASE / ENTRAXE ROUES	1,105.4 MM	1,131.1 MM	1,158.0 MM	1,189.4 MM
H	BB CENTER TO TOPTUBE CENTER / DIST. BOITIER - MILIEU TUBE SUPÉRIEUR				
I	BB CENTER TO TOP OF SEATTUBE / DIST. BOITIER - SOMMET TUBE DE SELLE	390.0 MM	440.0 MM	480.0 MM	530.0 MM
J	SEAT ANGLE / ANGLE TUBE DE SELLE	75.4 °	75.4 °	75.3 °	75.3 °
K	CHAINSTAY / LONGUEUR DES BASES	425.0 MM	425.0 MM	425.0 MM	425.0 MM
L	REACH / REACH	418.5 MM	442.3 MM	463.6 MM	491.2 MM
M	STACK / STACK	600.3 MM	604.9 MM	618.9 MM	628.1 MM
N	STEM LENGTH / LONGUEUR POTENCE	50.0 MM	60.0 MM	70.0 MM	80.0 MM
O	TRAIL / CHASSE AU SOL	105.0 MM	105.0 MM	105.0 MM	105.0 MM
P	FORK LENGTH / LONGUEUR FOURCHE	506.0 MM	506.0 MM	506.0 MM	506.0 MM
Q	MAXIMUM SEATPOST INSERTION / INSERTION MAXIMALE DE LA TIGE DE SELLE	160.0 MM	210.0 MM	250.0 MM	300.0 MM
R	CRANK LENGTH / LONGUEUR DE MANIVELLE	170.0 MM	170.0 MM	175.0 MM	175.0 MM