


Геометрия

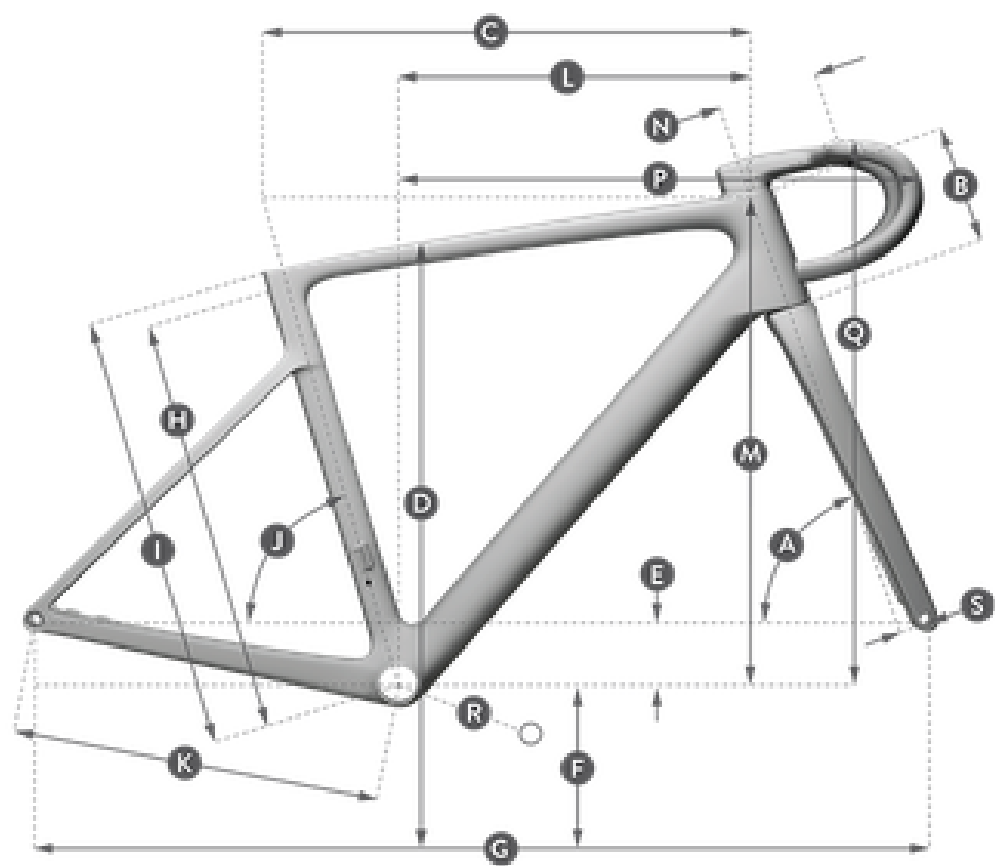

		XXS/47	XS/49	S/52	M/54	L/56	XL/58	XXL/61
A	УГОЛ РУЛЕВОЙ ТРУБЫ	71.3 °	71.8 °	72.3 °	72.8 °	73.4 °	73.6 °	73.8 °
B	ДЛИНА РУЛЕВОЙ ТРУБЫ	90.0 mm	100.0 mm	113.0 mm	130.0 mm	150.0 mm	170.0 mm	190.0 mm
C	ДЛИНА ВЕРХНЕЙ ТРУБЫ	519.0 mm	528.0 mm	542.0 mm	555.0 mm	572.0 mm	586.0 mm	602.0 mm
D	ВЫСОТА РАМЫ (СТЭНДОВЕР)	725.0 mm	740.0 mm	758.0 mm	778.0 mm	799.0 mm	820.0 mm	840.0 mm
E	СМЕЩЕНИЕ ЦЕНТРА КАРЕТКИ	-74.0 mm	-74.0 mm	-73.0 mm	-72.0 mm	-72.0 mm	-72.0 mm	-72.0 mm
F	ВЫСОТА КАРЕТКИ	270.5 mm	270.5 mm	271.5 mm	272.5 mm	272.5 mm	272.5 mm	272.5 mm
G	КОЛЕСНАЯ БАЗА	977.0 mm	983.2 mm	988.8 mm	990.8 mm	999.0 mm	1,006.4 mm	1,015.4 mm
H	ВЫСОТА ОТ ЦЕНТРА КАРЕТКИ ДО ВЕРХНЕЙ ТРУБЫ	412.5 mm	432.5 mm	452.1 mm	472.0 mm	492.2 mm	512.3 mm	532.4 mm
I	ВЫСОТА ОТ ЦЕНТРА КАРЕТКИ ДО КОНЦА ПОДС. ТРУБЫ	422.5 mm	442.5 mm	462.1 mm	482.0 mm	502.2 mm	522.3 mm	542.4 mm
J	УГОЛ ПОДСЕДЕЛЬНОЙ ТРУБЫ	74.5 °	74.5 °	74.0 °	73.6 °	73.3 °	72.8 °	72.5 °
K	ДЛИНА ЗАДНИХ ПЕРЬЕВ	410.0 mm	410.0 mm	410.0 mm	410.0 mm	410.0 mm	410.0 mm	410.0 mm
L	РИЧ	379.4 mm	386.3 mm	391.6 mm	395.2 mm	402.6 mm	406.1 mm	411.3 mm
M	СТЭК	501.3 mm	512.5 mm	525.5 mm	543.3 mm	564.5 mm	584.3 mm	604.2 mm
N	STEM LENGTH	80.0 mm	90.0 mm	100.0 mm	110.0 mm	110.0 mm	120.0 mm	120.0 mm
O	TRAIL	360.0 mm	380.0 mm	380.0 mm	400.0 mm	400.0 mm	400.0 mm	420.0 mm
P	cockpit reach	530.0 mm	547.0 mm	563.0 mm	577.0 mm	585.0 mm	599.0 mm	604.0 mm
Q	cockpit min. stack	562.0 mm	573.0 mm	586.0 mm	604.0 mm	623.0 mm	643.0 mm	662.0 mm
R	crank arm length	165.0 mm	165.0 mm	170.0 mm	172.5 mm	172.5 mm	175.0 mm	175.0 mm
S	fork offset	47.0 mm	47.0 mm	47.0 mm	44.0 mm	44.0 mm	44.0 mm	44.0 mm