


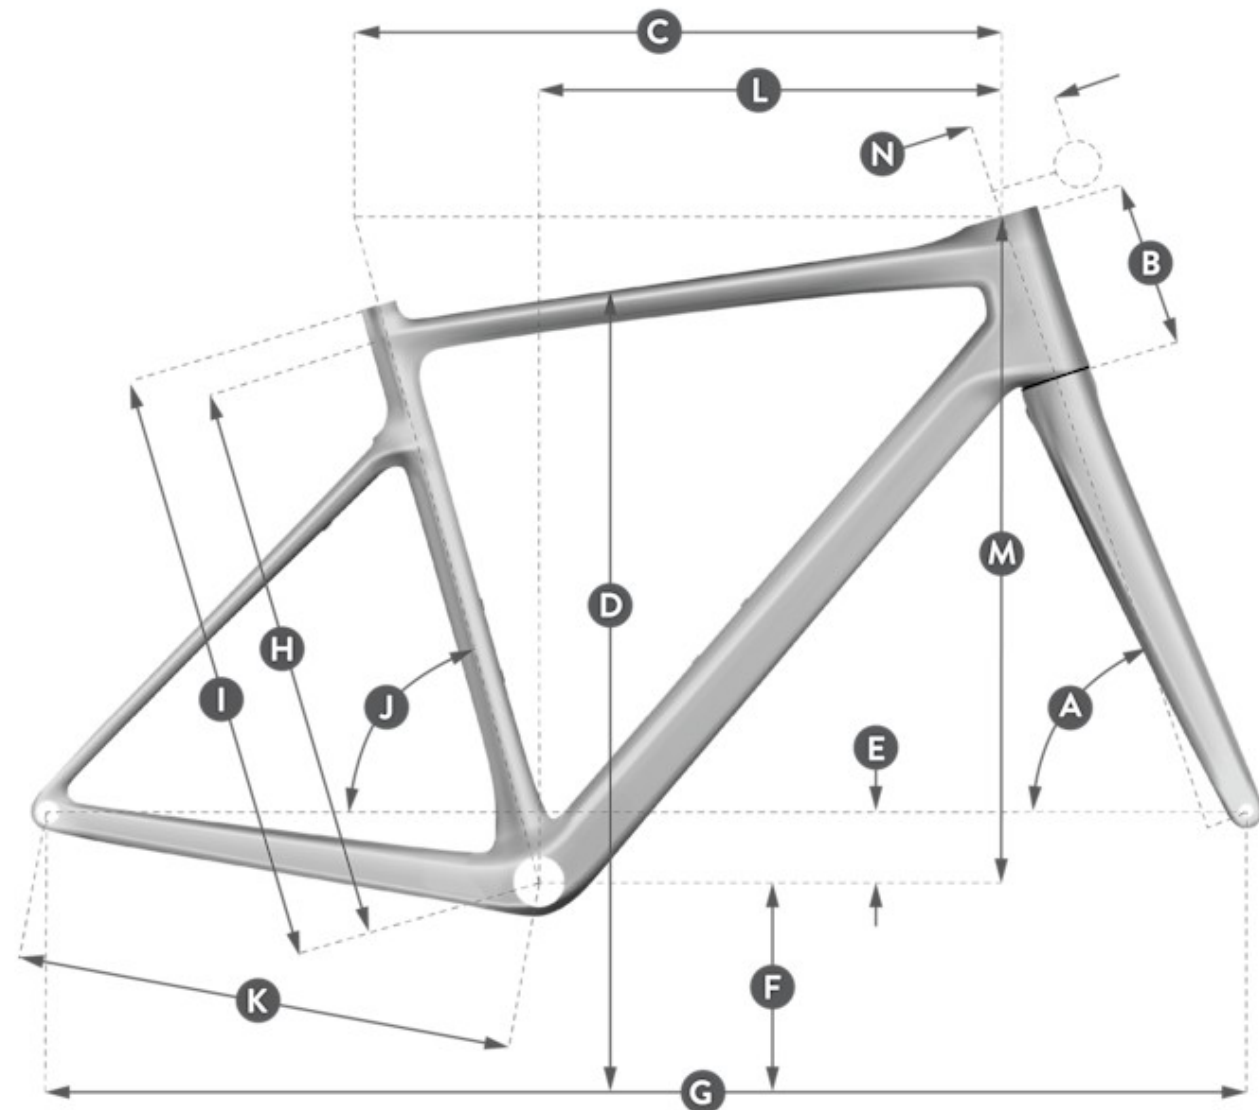

|                                                                       | XXS/47     | XS/49      | S/52       | M/54       | L/56       | XL/58      | XXL/61     |
|-----------------------------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|
| A HEAD TUBE ANGLE / ANGLE TUBE DE DIRECTION                           | 70.5 °     | 71.0 °     | 72.0 °     | 72.5 °     | 73.0 °     | 73.3 °     | 73.3 °     |
| B HEAD TUBE LENGTH / HAUTEUR TUBE DE DIRECTION                        | 93.0 MM    | 103.0 MM   | 123.0 MM   | 143.0 MM   | 163.0 MM   | 183.0 MM   | 203.0 MM   |
| C TOP TUBE HORIZONTAL / LONGUEUR HORIZONTALE TUBE SUPÉRIEUR           | 515.0 MM   | 525.0 MM   | 540.0 MM   | 554.0 MM   | 569.0 MM   | 583.0 MM   | 596.0 MM   |
| D STANDOVER HEIGHT / HAUTEUR ENTRE-JAMBES                             | 735.0 MM   | 754.0 MM   | 780.0 MM   | 800.0 MM   | 820.0 MM   | 840.0 MM   | 864.0 MM   |
| E BB OFFSET / DEPORT AXE DE PÉDALIER                                  | -70.0 MM   | -70.0 MM   | -70.0 MM   | -70.0 MM   | -70.0 MM   | -70.0 MM   | -70.0 MM   |
| F BB HEIGHT / HAUTEUR AXE DE PÉDALIER                                 | 275.3 MM   | 275.3 MM   | 275.3 MM   | 275.3 MM   | 275.3 MM   | 275.3 MM   | 275.3 MM   |
| G WHEEL BASE / ENTRAXE ROUES                                          | 1,001.5 MM | 1,007.9 MM | 1,010.0 MM | 1,015.8 MM | 1,023.3 MM | 1,030.3 MM | 1,043.0 MM |
| H BB CENTER TO TOPTUBE CENTER / DIST. BOITIER - MILIEU TUBE SUPÉRIEUR | 430.0 MM   | 450.0 MM   | 480.0 MM   | 500.0 MM   | 520.0 MM   | 540.0 MM   | 570.0 MM   |
| I BB CENTER TO TOP OF SEATTUBE / DIST. BOITIER - SOMMET TUBE DE SELLE | 470.0 MM   | 490.0 MM   | 520.0 MM   | 540.0 MM   | 560.0 MM   | 580.0 MM   | 610.0 MM   |
| J SEAT ANGLE / ANGLE TUBE DE SELLE                                    | 75.0 °     | 75.0 °     | 74.5 °     | 74.0 °     | 73.5 °     | 73.1 °     | 73.0 °     |
| K CHAINSTAY / LONGUEUR DES BASES                                      | 425.0 MM   | 425.0 MM   | 425.0 MM   | 425.0 MM   | 427.0 MM   | 427.0 MM   | 427.0 MM   |
| L REACH / REACH                                                       | 376.0 MM   | 383.0 MM   | 387.0 MM   | 391.0 MM   | 385.0 MM   | 399.0 MM   | 406.0 MM   |
| M STACK / STACK                                                       | 517.8 MM   | 529.1 MM   | 551.6 MM   | 572.4 MM   | 593.3 MM   | 613.6 MM   | 632.7 MM   |
| N STEM LENGTH / LONGUEUR POTENCE                                      | 83.0 MM    | 83.0 MM    | 93.0 MM    | 103.0 MM   | 103.0 MM   | 113.0 MM   | 113.0 MM   |