


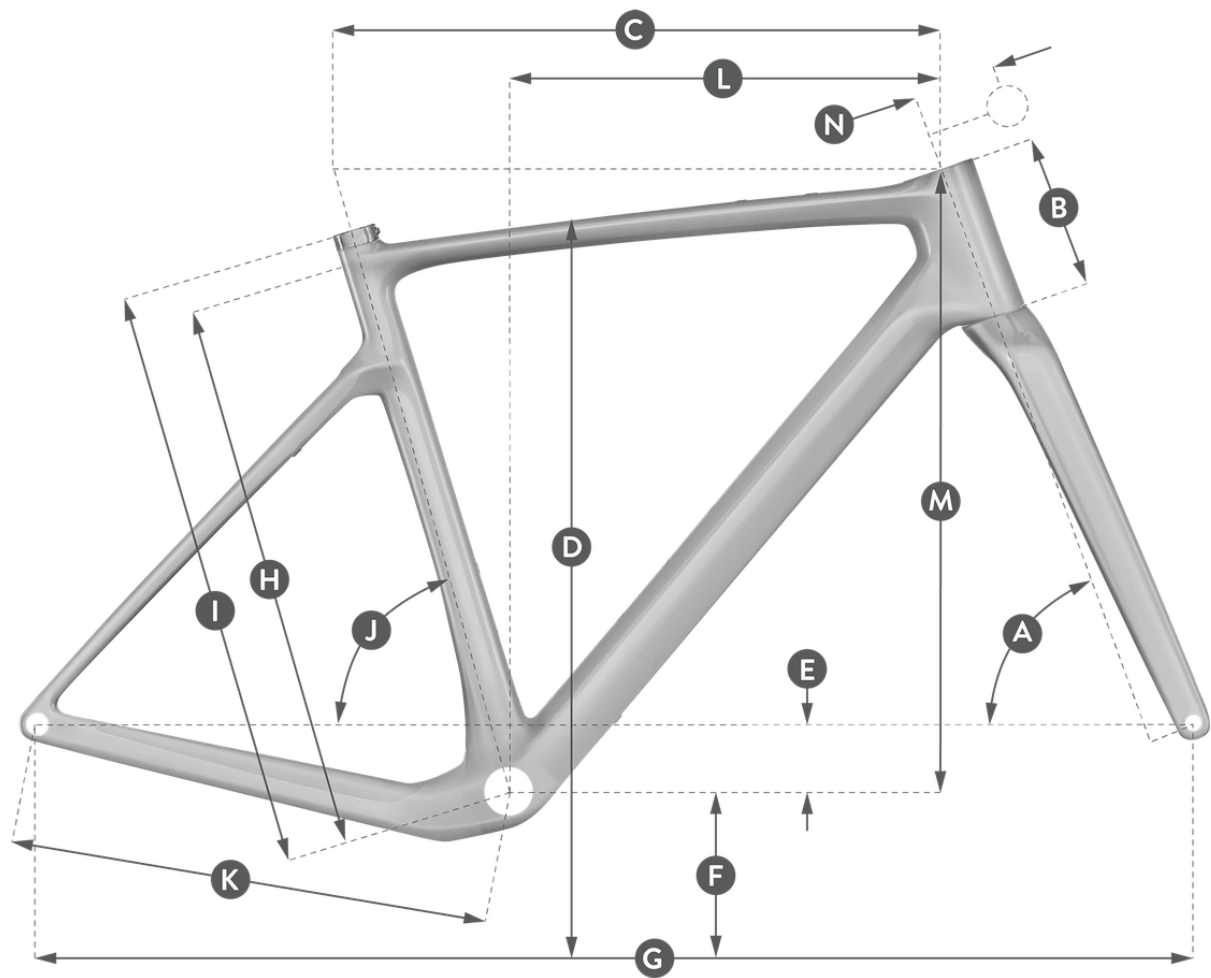

		XS/49	S/52	M/54	L/56	XL/58
A	HEAD TUBE ANGLE / ANGLE TUBE DE DIRECTION	70.0 °	70.0 °	71.0 °	71.0 °	71.0 °
B	HEAD TUBE LENGTH / HAUTEUR TUBE DE DIRECTION	95.0 MM	122.0 MM	140.0 MM	166.0 MM	187.0 MM
C	TOP TUBE HORIZONTAL / LONGUEUR HORIZONTALE TUBE SUPÉRIEUR	518.0 MM	534.5 MM	554.5 MM	578.5 MM	592.5 MM
D	STANDOVER HEIGHT / HAUTEUR ENTRE-JAMBES	759.0 MM	786.0 MM	807.0 MM	828.0 MM	847.0 MM
E	BB OFFSET / DEPORT AXE DE PÉDALIER	-71.0 MM	-71.0 MM	-71.0 MM	-71.0 MM	-71.0 MM
F	BB HEIGHT / HAUTEUR AXE DE PÉDALIER	283.0 MM	283.0 MM	283.0 MM	283.0 MM	283.0 MM
G	WHEEL BASE / ENTRAXE ROUES	1,009.4 MM	1,022.9 MM	1,029.2 MM	1,048.7 MM	1,063.5 MM
H	BB CENTER TO TOPTUBE CENTER / DIST. BOITIER - MILIEU TUBE SUPÉRIEUR	447.0 MM	477.0 MM	498.0 MM	516.0 MM	536.0 MM
I	BB CENTER TO TOP OF SEATTUBE / DIST. BOITIER - SOMMET TUBE DE SELLE	477.0 MM	507.0 MM	528.0 MM	546.0 MM	566.0 MM
J	SEAT ANGLE / ANGLE TUBE DE SELLE	74.5 °	74.0 °	73.5 °	73.0 °	73.0 °
K	CHAINSTAY / LONGUEUR DES BASES	425.0 MM	425.0 MM	425.0 MM	425.0 MM	425.0 MM
L	REACH / REACH	374.1 MM	378.4 MM	387.1 MM	398.2 MM	406.1 MM
M	STACK / STACK	519.0 MM	544.4 MM	565.3 MM	589.9 MM	609.7 MM
N	STEM LENGTH / LONGUEUR POTENCE	83.0 MM	93.0 MM	103.0 MM	103.0 MM	113.0 MM