


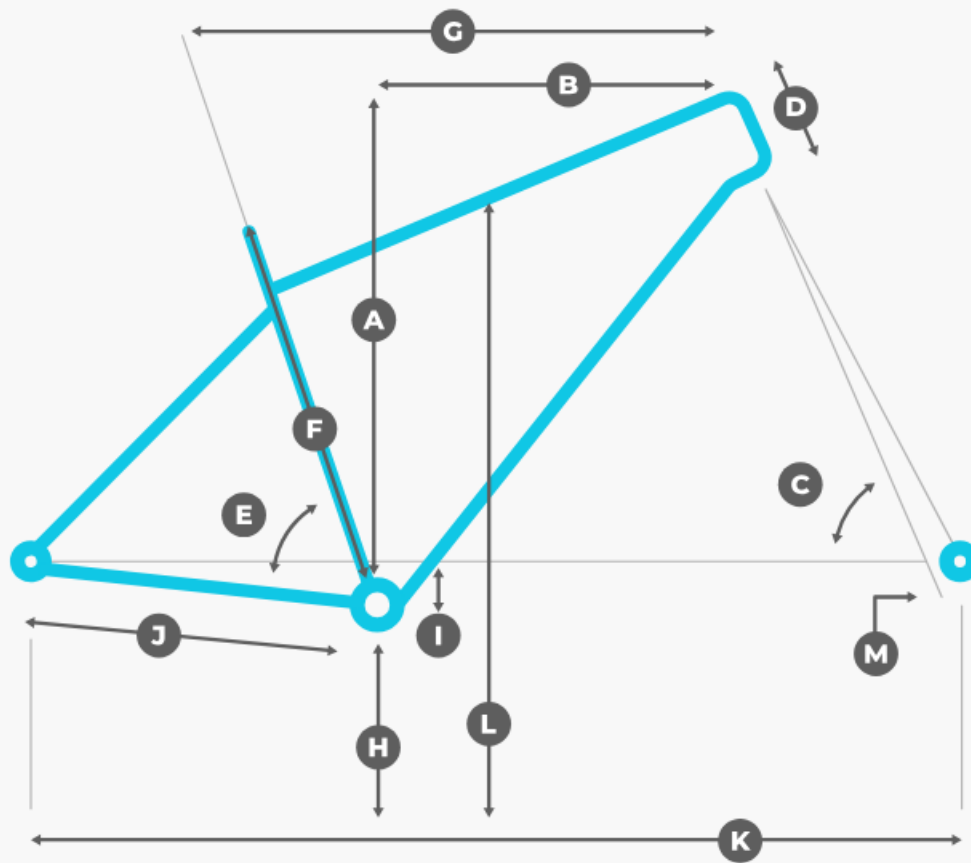

|                           | S          | M         | L         | XL        |
|---------------------------|------------|-----------|-----------|-----------|
| Rider Height              | 4'11"–5'4" | 5'4"–5'9" | 5'9"–6'2" | 6'2"–6'5" |
| (A) Stack                 | 541        | 570       | 600       | 628       |
| (B) Reach                 | 380        | 390       | 400       | 410       |
| (C) Head Tube Angle       | 70.5°      | 70.5°     | 71°       | 71°       |
| (D) Head Tube Length      | 115        | 145       | 175       | 205       |
| (E) Seat Tube Angle       | 74.5°      | 74.5°     | 74°       | 73.5°     |
| (F) Seat Tube Length      | 430        | 460       | 490       | 520       |
| (G) Top Tube Effective    | 530        | 548       | 572       | 596       |
| (H) Bottom Bracket Height | 286        | 286       | 286       | 286       |
| (I) Bottom Bracket Offset | 72         | 72        | 72        | 72        |
| (J) Chainstay Length      | 440        | 440       | 440       | 440       |
| (K) Wheelbase             | 1033       | 1053      | 1069      | 1088      |
| (L) Standover Height      | 703        | 735       | 763       | 793       |

\* All lengths in **mm**