


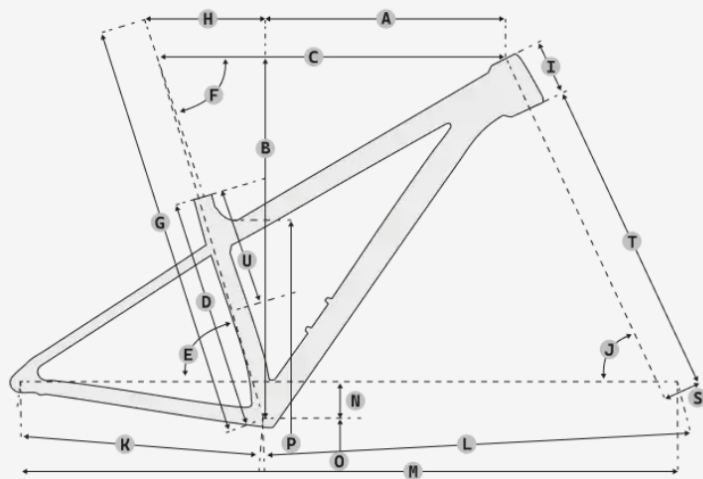

	EXTRA SMALL	SMALL	MEDIUM	LARGE	X- LARGE	XX- LARGE
A Reach	395	415	435	455	475	500
B Stack	579	609	625	635	644	676
C Effective top tube	561	590	614	637	660	694
D Seattube length	340	380	410	440	460	500
E Effective seattube angle	74°	74°	74°	74°	74°	74°
F Actual seattube angle	72°	72°	72°	72°	72°	72°
G Saddle height for saddle offset	600	650	700	750	800	850
H Saddle offset at saddle height						
I Headtube length	100	110	110	120	130	140
J Headtube angle	67°	67°	67°	67°	67°	67°
K Chainstay length	430	430	445	445	445	445
L Front centre						
M Wheelbase	1092	1113	1165	1189	1213	1252
N Bottom bracket drop	-50	-50	-70	-70	-70	-70
O Bottom bracket height						
P Stand over height						
Q Fork travel	80	100	100	100	100	100
R Trail						
S Fork offset	44	44	44	44	44	44
T Axle to crown						
U Maximum seatpost insert						